


ITEM	QTY	PART NUMBER	DESCRIPTION
A	1	RJ45 8P8C CAT6 LS	RJ45 with Locking Screw PVC Mold blue PANTONE660
B	LGH.	CAT6 F-STP#24(7/0.196BC)*4P+AEB 6mm	Cable, PVC black, CAT6 F-STP
C	1	RJ45 8P8C CAT6	RJ45 PVC Mold black
D	2	M2 L30mm E20	Locking Screw

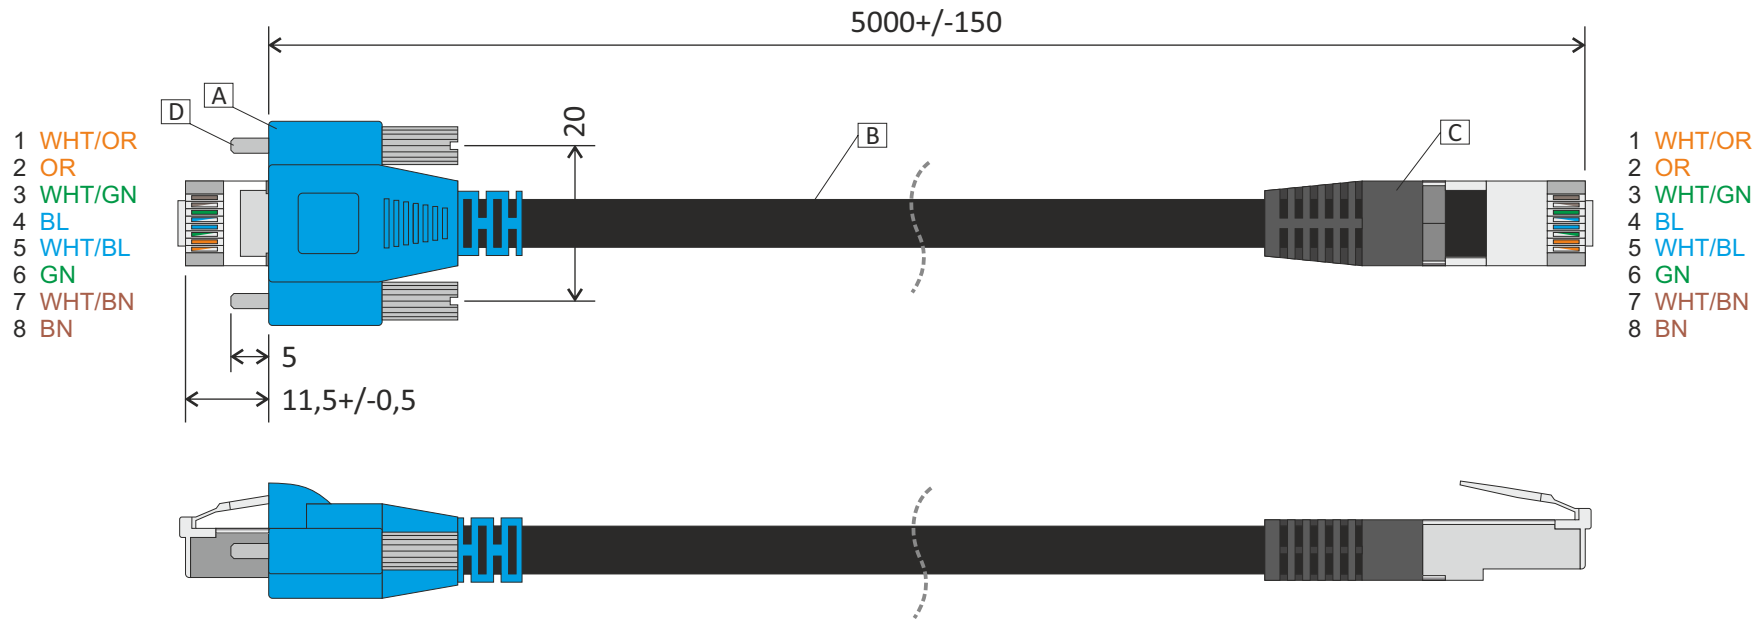

NOTE: All relevant materials are compliant with RoHS/REACH directive

RJ45 with LS to Rj45 F-STP CAT 6		General Tolerances ISO 2768-1 (medium)	Projection
Art. No.: CA-GigE/5/BLS	All Rights Reserved Copyright by DIN34	Drafter:	Date:
Mfg. Type: A112-A015-V24	Drawn:	Martin Teuber	2025-08-04
TIS-PN: 20800000008	Revision:		
Document Name: TISC-0013	Revision:		
 THE IMAGINGSOURCE TECHNOLOGY BASED ON STANDARDS The Imaging Source Europe GmbH Überseetor 18 28237 Bremen/Germany ☎+49421335910 www.theimagingsource.com	Revision:		
	Revision:		
	Revision:		
M 1:1	Page Size: A4	Page: 1 # 1	

Minimum bend radius: 25mm
 Isolation Test: 200V DC/0,01sec
 Isolation: 10MOhm min
 Coper Resistance: 30hm max
 Complient with RoHS Directive