ITEM	QTY	PART NUMBER	DESCRIPTION
1	LGH.	UL2725 USB 3.0 Cable OD:6.5mm	USB 3.0 Cable Black
2	1	USB 3.0 micro B	P1 USB 3.0 A Connector
3	1	USB 3.0 A 7P	P2 USB 3.1 Typ C Connector
4	A/R	45P PVC PANTONE660C	Outer Mold blue
5	4	Heat Shrink Tube d1x3mm black	HST
6	A/R	LD-PE	Inner Mold clear
7	2	M2 L45mm E31	Locking Screw

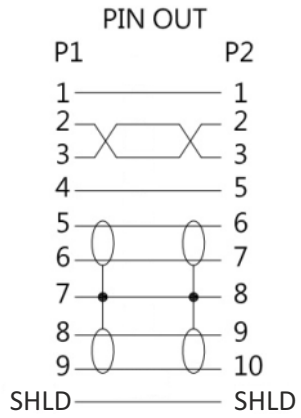

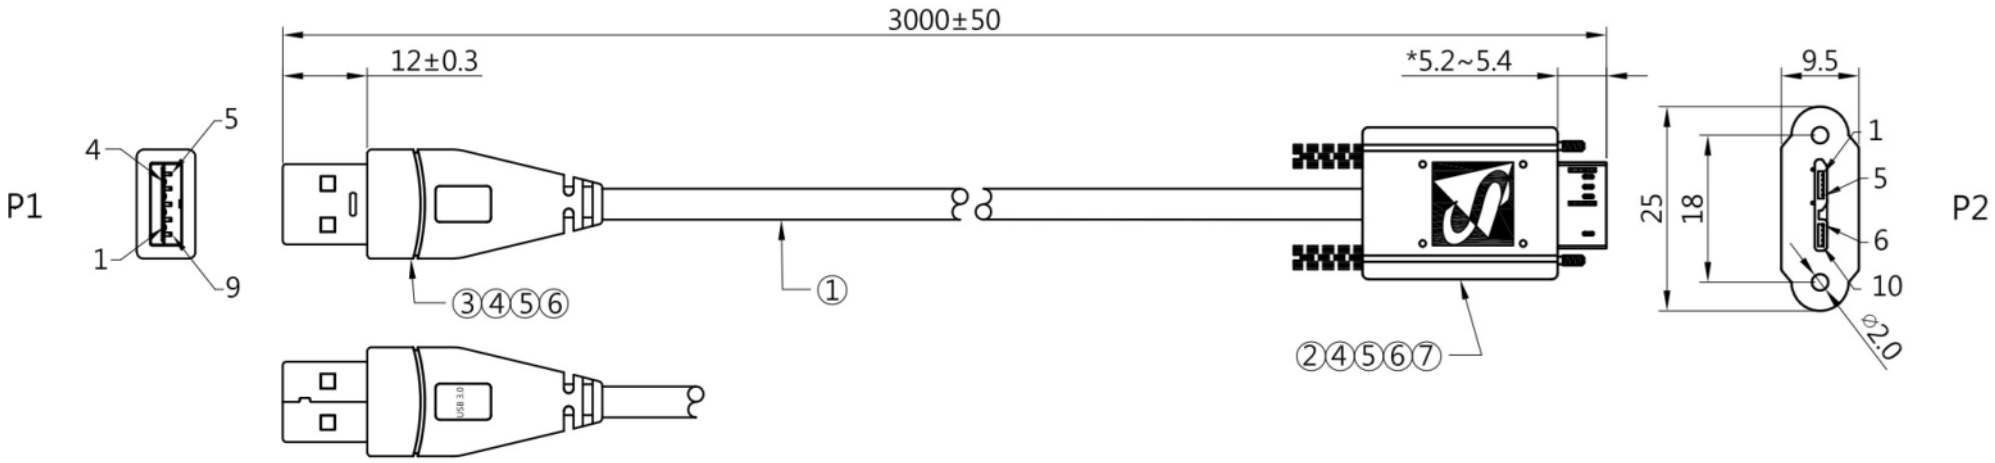

NOTE: All relevant materials are compliant with RoHS/REACH directive

USB 3.0 Cable A to micro B LS 3m		General Tolerances ISO 2768-1 (medium)	Projection
Art. No.: CA-USB30-AmB-BLS/3	All Rights Reserved Copyright by DIN34	Drafter:	Date:
Mfg. Type: A112-A030-V01	Drawn:	Martin Teuber	2025-08-13
TIS-PN: 20800000020	Revision:		
Document Name: TISC-0018	Revision:		
THE IMAGINGSOURCE TECHNOLOGY BASED ON STANDARDS	Revision:		
	Revision:		
The Imaging Source Europe GmbH	Revision:		
Überseetor 18 28237 Bremen/Germany ☎+49421335910			
www.theimagingsource.com	M 1:1	Page Size: A4	Page: 1 # 1