ITEM	QTY	PART NUMBER	DESCRIPTION
1	4700mm	Ul2464 24AWG 6C+AL OD:5.5mm -40 - +80°C PVC	LiYY 6x0,22 Cable Black
2	300+300mm	Ul2464 24AWG 3C+E OD:4.5mm -40 - +80°C PVC	LiYY 4x0,22 Cable Black
3	1	HR10A-10P-12S(73)	Hirose 12P Female Solder Type
4	1	M12A-5P PA66 Black Gold Plated	M12 5Pin Waterproof female
5	1	1mm PCB double sided	PCB Adapter Board
6	A/R	LD-PE	Inner Mold clear
7	A/R	45P PVC black	Outer Mold black

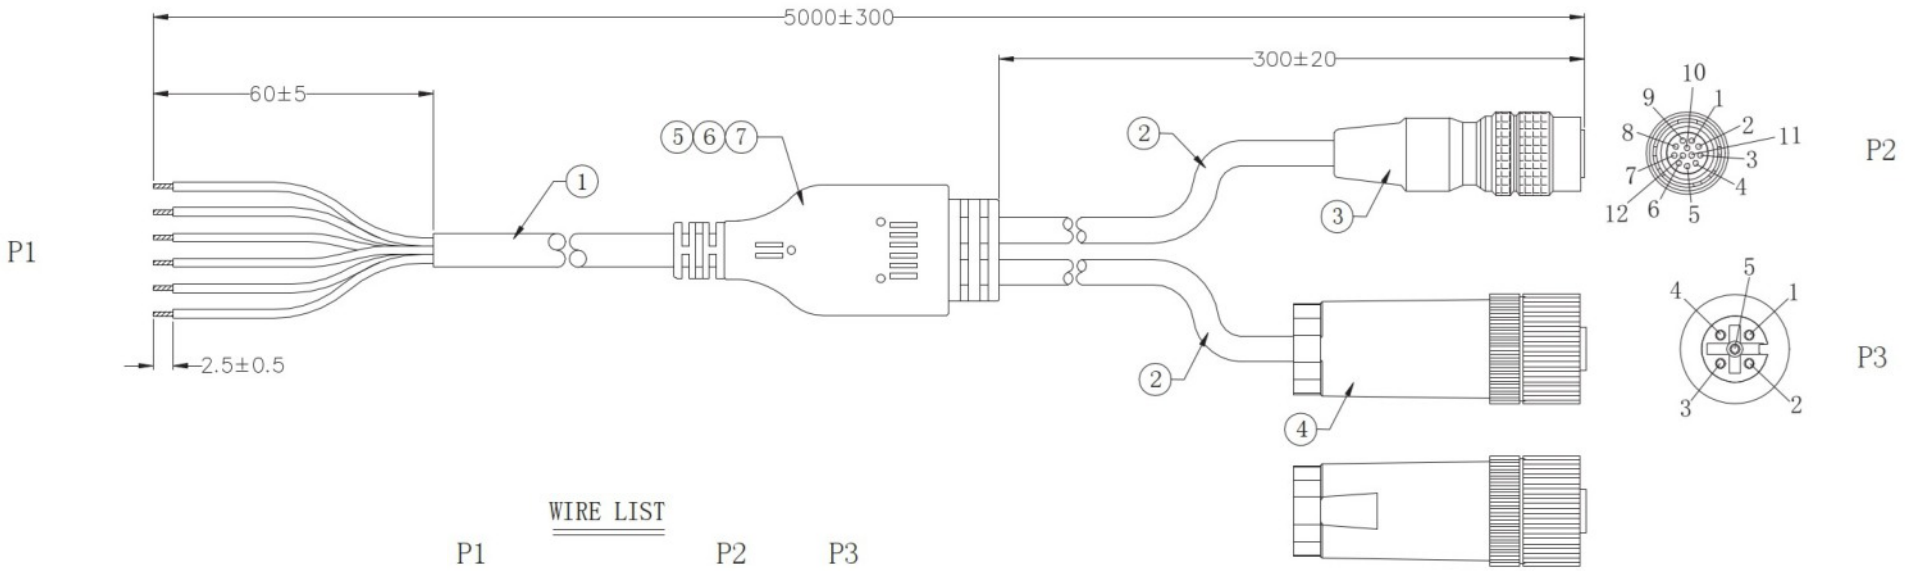

WIRE LIST

P1		P2	P3
TIN	white	NC	
TIN	brown	Trig+	11
TIN	green	Trig-	12
TIN	yellow	+24V	1
TIN	gray	0-10V Dim	5
		Strobe	10 2
NC	1, 2, 3, 5, 6, 8, 9		
		GND	7
TIN	pink	GND	3
		NC	4

NOTE: All relevant materials are compliant with RoHS/REACH directive

Smart Light Y Cable 12P HR10A 5m		General Tolerances ISO 2768-1 (medium)	Projection
Art. No.: CA-Y-USB3-12P-SVL-5m	All Rights Reserved Copyright by DIN34	Drafter:	Date:
Mfg. Type: 1112RC007	Drawn:	Martin Teuber	2025-08-13
TIS-PN: 20800000056	Revision:		
Document Name: TISC-0024	Revision:		
THE IMAGINGSOURCE TECHNOLOGY BASED ON STANDARDS	Revision:		
	Revision:		
The Imaging Source Europe GmbH	Revision:		
Überseetor 18 28237 Bremen/Germany ☎+49421335910			
www.theimagingsource.com	M 1:1	Page Size: A4	Page: 1 # 1